



DLFL-225 (25W)



- Versatile design emphasizing on beauty
- Metal bracket is enclosed for the easy installation
- Maximum output is 4000lumen
- Available to set the brightness in 2 steps using a pulling switch (DLFL-246, DLFL-250)



Crystal cover available

■ Benefit


- Possible to use it in all places to apply for LED lamp

- Bringing maximum energy saving effect with low energy consumption
- Low operating temperature with the optimal heat release system


■ Features


- Express its own exclusivity with the smooth design

- Uniform dispersion of light with specially designed cover

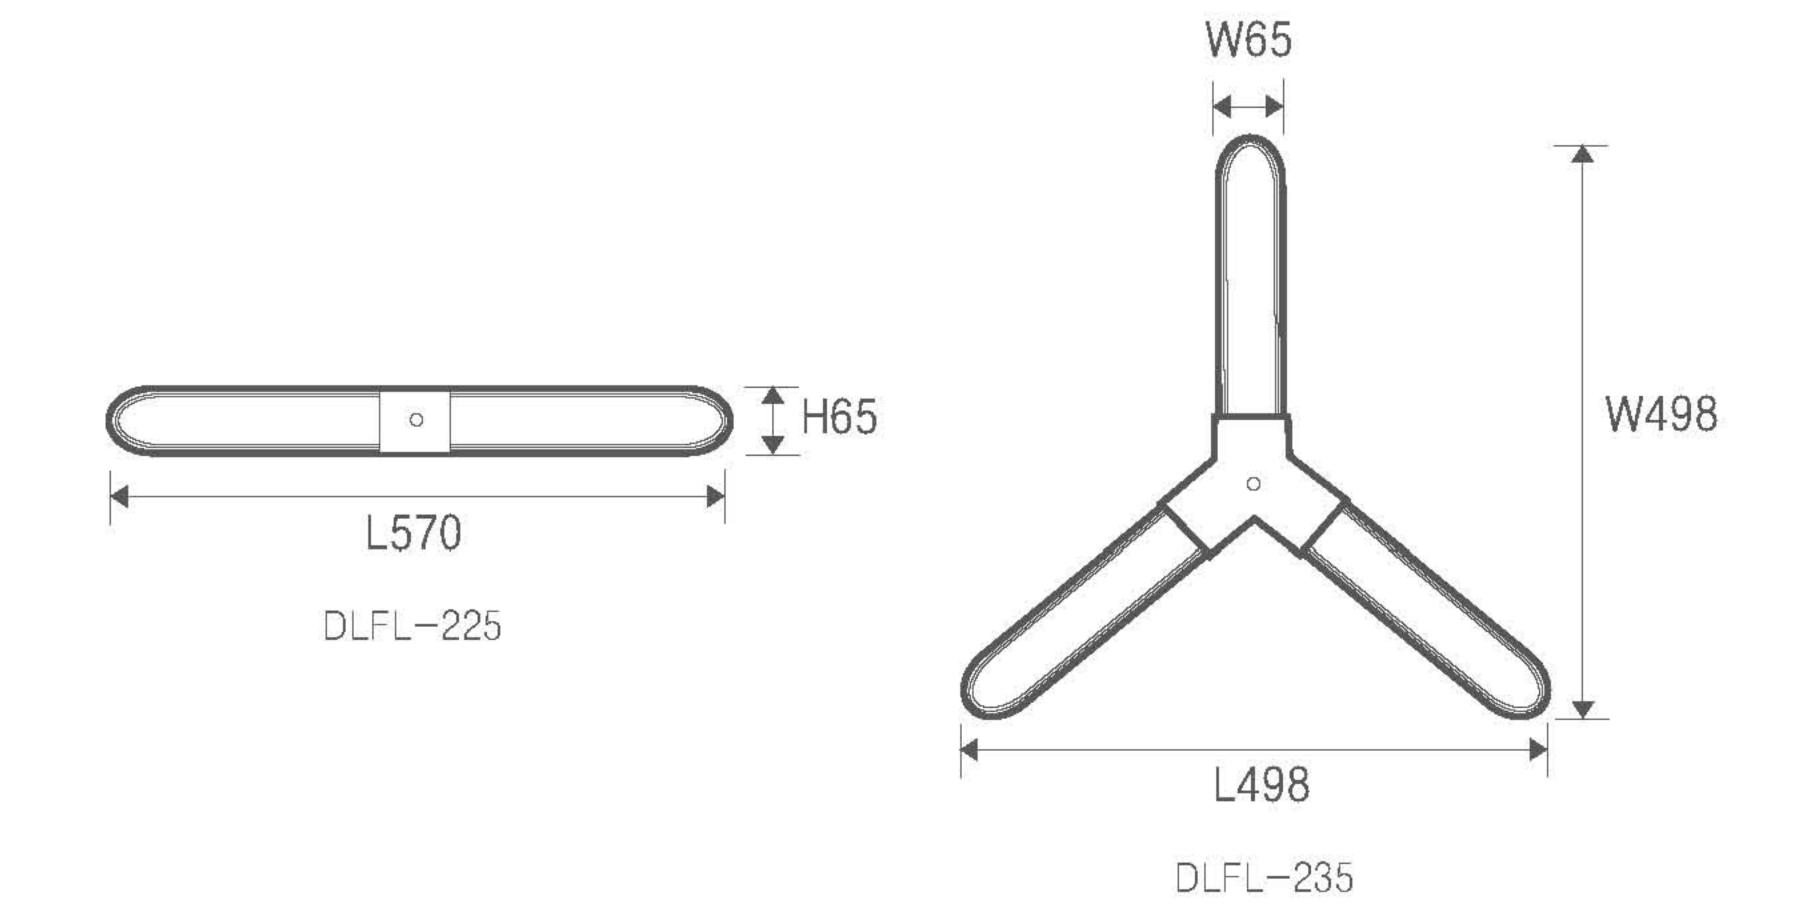

Product	DLFL-225	DLFL-235	DLFL-246(S/W-CROSS)	DLFL-250(S/W)
Power consumption (w)	25	33	44	50
Efficiency (Im/W)	85			
Color temperature (K)	6,500/3,000			
Color rendering index (Ra/CRI)	over 80Ra			
Size (mm)	570×65	498×498	562×562	570×110
Material	PC			

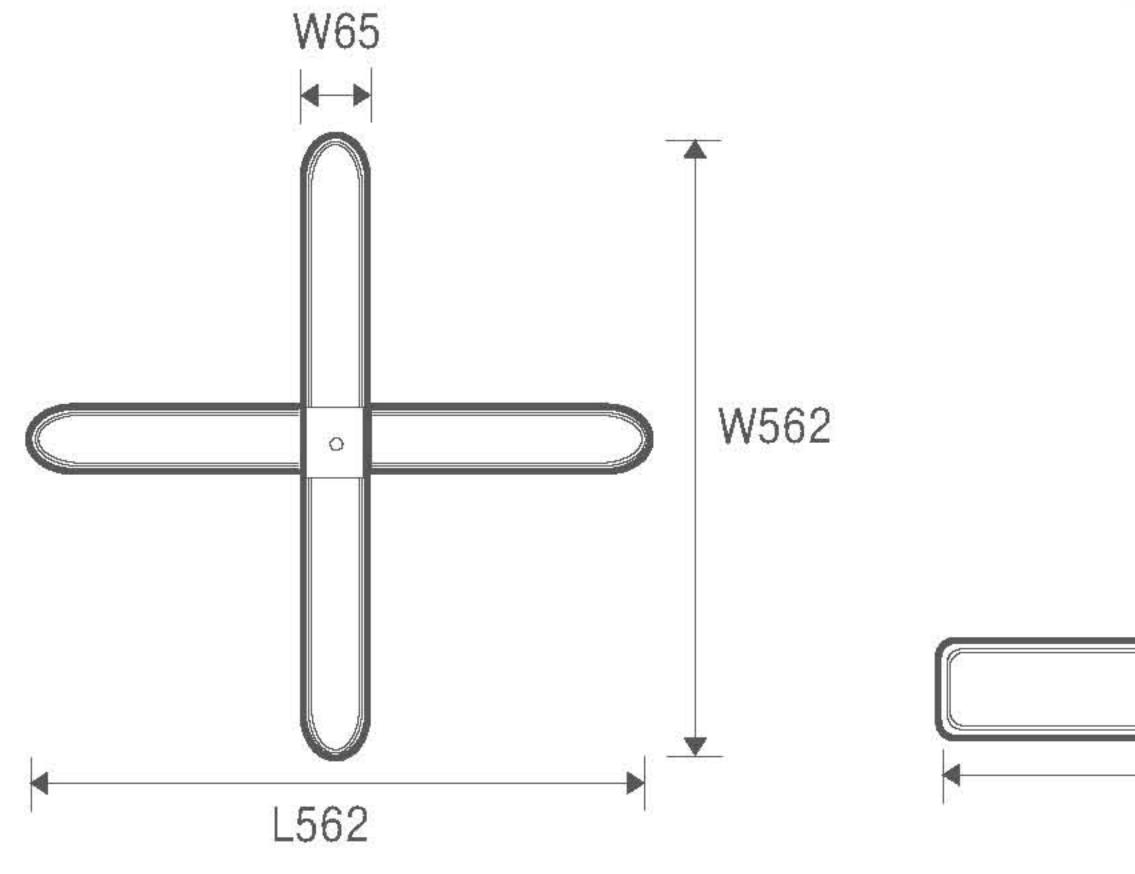

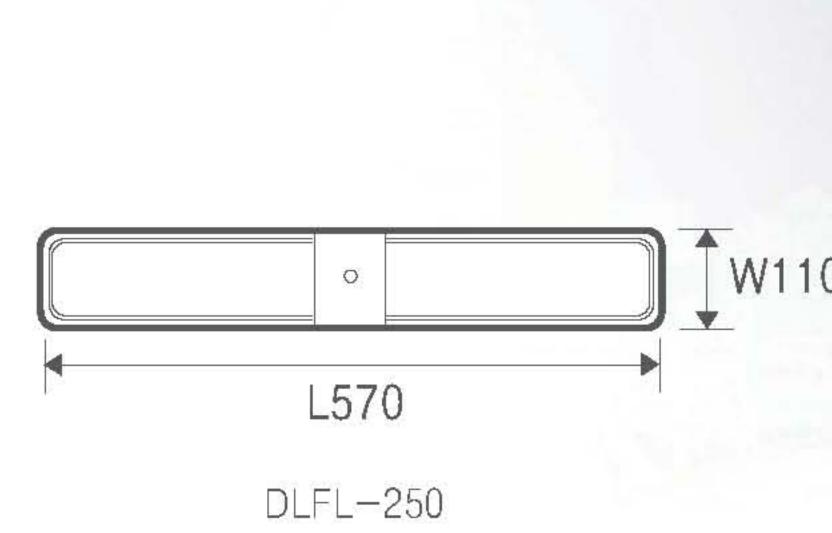



DLFL-246